


## Stainless steel valves for corrosive environments & water base fluids

explosion-proof solenoid valves, with Atex or C UL US certification and pressure relief valves

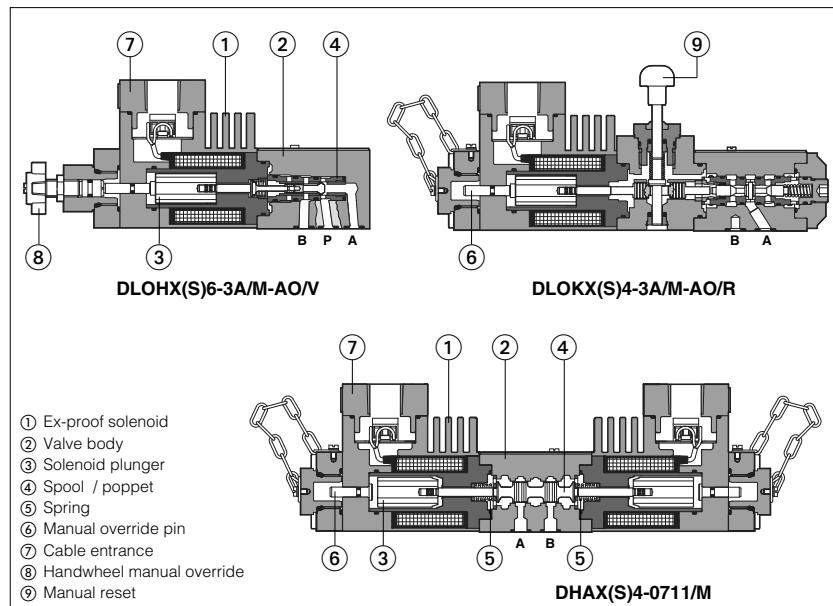

New line of directional solenoid valves and pressure relief valves in stainless steel execution for corrosive environments.

Stainless steel solenoids ①, ex-proof Atex or C UL US, for hazardous areas -see section ③.

Two executions are available:

•**X** stainless steel for external and internal parts, to withstand extreme and corrosive environmental conditions, and to ensure full compatibility also with water base and special fluids.

•**XS** stainless steel for external parts to withstand extreme and corrosive environmental conditions. Internal components are derived from standard valves.

Directional valves are available in two basic versions: poppet type, 3-way leak free (suitable for accumulator systems) or spool type, 4-way on-off valves.

Explosion proof solenoids ① with:

-ATEX 94/9/CE certification, protection mode Ex II 2GD, Ex d IIC T6/T4/T3, Ex d A21 IP67

-C UL US certification, according to UL 1002 and CSA 22.2 n°139-1982 class I Group C & D (Group IIA & IIB to NEC 505-7)

### Common Applications:

Offshore, Marine, Chemical, Energy, Minery, Subsea Plants

#### 1 STAINLESS STEEL VALVES: MAIN DATA

Valve execution (1) X	XS	Description	ISO size	Voltages		ATEX		C UL US		Max flow l/min	$\Delta p$ (at max flow) bar	Max pressure bar (3)	
				DC	AC	T class (1) Standard	Option 7	Input Power	T class (1)				
DHAX4	DHAXS6 DHAXS4	4 way, spool type direct solenoid valves	06 (ISO 4401)	12	12/50/60	T6 T4	T4 T3	8 25	(2) T4	12 33	60 70	350	
DLOHX6-AO DLOHX4-AO	DLOHXS6-AO DLOHXS4-AO	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	24	24/50/60	T6 T4	T4 T3	8 25	(2) T4	12 33	10 12	315 350	
DLOKX4-AO	DLOKXS6-AO DLOKXS4-AO	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	48	110/50	T6 T4	T4 T3	8 25	(2) T4	12 33	25 30	250 315	
DLOPX6-AO	DLOPXS6-AO	3 way, poppet type, piloted solenoid valve	no	110	120/60 220/50	T6 T4	T4 T3	8 25	(2) T4	12 33	220	315	
DLPX	DLPXS	3 way, poppet type, hydraulic operated valve	no	220	220/60	T6	T4	8	(2)	12	220	315	
SP-CART-MX-3 SP-CART-MX-6 SP-CART AREX-20	SP-CART-MXS-3 SP-CART-MXS-6 SP-CART AREXS-20	relief valve direct screw-in	no no no	—	—	—	—	—	—	—	2,5 40 (60 PED) 120 (150 PED)	30	
HMPX-*	HMPXS-*	relief valve direct modular	06 (ISO 4401)	—	—	—	—	—	—	—	40	35	350
SC LIX-2531* LIMMX-2* (4)	LIMMxs-2/* (4)	relief valve DIN cartridge	25 (ISO 7368)	—	—	—	—	—	—	—	400	6	350

#### Notes:

(1) XS6 and XS4 versions differ only for the coil power (see Input Power) - For ATEX certification the certified temperature class T6, T4, T3 is related to the max ambient temperature, from which results the max solenoid surface temperature allowed in the application (see section ③). The reference ambient temperature is  $-40^{\circ} + 70^{\circ}$ C, for higher ambient temperature ( $-40^{\circ} + 70^{\circ}$ C) the temperature class has to be degraded (option 7). For C UL US certification the temperature class is related to the coil power 12W or 33 W

(2) For C UL US certification the temperature class corresponding to the coil power 12W is not reported in the nameplate marking. For coil power 33W the temperature class is T4.

(3) Max pressure on T port = 110 bar

(4) Optional electrohydraulic venting available on request.

(5) Valves are provided by HNBR seals, which allow min ambient temperature down to  $-40^{\circ}$ C (max oil viscosity = 380 cSt). The min ambient temperature for valves with PE option (FPM seals) is  $-20^{\circ}$ C.

#### 2 MATERIALS SPECIFICATION

Valve type	solenoid housing ①	valve body ②	internal parts for X execution ③ + ④		internal parts for XS execution ③ + ④		spring ⑤	seals	
			std	/PE	std	/PE		std	/PE
DHAX(S)	AISI 630	AISI 316L	AISI 316L, 420B, 440C, 430F		Carbon steel		AISI 302	HNBR (buna)	FPM (viton)
DLOHX(S) DLOKX(S)	AISI 630	AISI 316L	AISI 316L, 420B, 440C, 430F		Carbon steel		AISI 302	HNBR (buna)	FPM (viton)
DLOPX(S)	AISI 630	AISI 630	AISI 316L, 420B, 440C, 430F		Carbon steel		AISI 302	HNBR (buna)	FPM (viton)
DLPX(S)	—	AISI 630	AISI 420B		Carbon steel		AISI 302	HNBR (buna)	FPM (viton)
SP-CART-X(S)	—	AISI 316L	AISI 316L, 420B, 630		Carbon steel		AISI 302	HNBR (buna)	FPM (viton)
HMPX(S)	—	AISI 316L	AISI 316L, 420B, 630		Carbon steel		AISI 302	HNBR (buna)	FPM (viton)
LIMMX(S)	—	AISI 316L	AISI 316L, 420B, 630		Carbon steel		AISI 302	HNBR (buna)	FPM (viton)
SC LIX	—	AISI 316L	AISI 630, AISI 420B	-			AISI 302	HNBR (buna)	FPM (viton)

### 3 EXPLOSION PROOF SOLENOIDS: MAIN DATA


	DLOHXS6 DLOPXS6	DLOHXS6 DLOKXS6 DLOPXS6	DHAX4 DLOHX4 DLOKX4	DHAXS4 DLOHXS4 DLOKXS4
Solenoid code	<b>ATEX</b>	OAX/WP		OAX/WP
Voltage code	VDC VAC 50/60 Hz	$\pm 10\%$ $\pm 10\%$	<b>12DC, 24DC, 48DC, 110DC, 220DC</b> <b>12AC, 24AC, 110AC, 230AC (1)</b>	
Power consumption	<b>ATEX</b> <b>C UL US</b>	8W 12W		25W 33W
Coil insulation		Class H		
Protection degree		IP 67 According to IEC 144 when correctly coupled with the relevant cable gland SP-PAX19*, see section [17]		
Duty factor		100%		
Mechanical construction		Explosion proof safety case classified Ex d, according to EN 60079-0: 2006, EN 60079-1: 2007		
Cable entrance and electrical wiring		Internal terminal board for cable connection threaded connection M20x1,5 for cable entrance, vertical (standard) or Horizontal (option /O) See section [17] for cable gland		
Method of protection		Ex d		
Temperature class (surface temperature)	<b>ATEX</b> <b>C UL US</b>	T6 ( $\leq 85^{\circ}\text{C}$ ) Not applicable	T4 ( $\leq 135^{\circ}\text{C}$ ) option /7 T4 ( $\leq 135^{\circ}\text{C}$ )	T3 ( $\leq 200^{\circ}\text{C}$ ) option /7 T4 ( $\leq 135^{\circ}\text{C}$ )
Ambient temperature	<b>ATEX</b> <b>C UL US</b>	-40 $\div$ +45 °C -40 $\div$ +70 °C	-40 $\div$ +40 °C -40 $\div$ +70 °C	-40 $\div$ +70 °C -40 $\div$ +70 °C
<b>Atex certification</b>				
<b>Ex</b>	= Equipment for explosive atmospheres			
<b>II</b>	= Group II for surfaces plants			
<b>2</b>	= High protection (equipment category)			
<b>GD</b>	= For gas, vapours and dust			
<b>d</b>	= Flame proof housing			
<b>IIC</b>	= Gas group			
<b>T6/T4/T3</b>	= Temperature class of solenoid surface referred to +40°C ambient temperature			
<b>tD</b>	= Dust ignition protection			
<b>A21</b>	= Housing protection practice (for dust)			
<b>IP67</b>	= Protection degree			
<b>Zone 1 (gas) and 21 (dust)</b>	= Possibility of explosive atmosphere during normal functioning			
<b>Zone 2 (gas) and 22 (dust)</b>	= Low probability of explosive atmosphere			
<b>C UL US certification</b>				
<b>Class I</b>	= Equipment for flammable gas and vapours			
<b>Division 1</b>	= Possibility of explosive atmosphere during normal functioning			
<b>Groups C&amp;D</b>	= Gas group (according to UL 1002)			
<b>Groups IIA&amp;IIB</b>	= Gas group (according to NEC 505-7)			
<b>T4</b>	= Temperature class of solenoid surface referred to +70°C ambient temperature			

(1) For alternating current supply a rectifier bridge is integrated in the solenoid


### 4 SPOOL TYPE DIRECTIONAL SOLENOID VALVES: MODEL CODE

DHA	X	4	*	0	63	1/2	/	PA	-	M	/	V	24DC	**	/
Spool type - direct															
X = Stainless steel execution for all parts															
XS = Stainless steel execution for external parts															
Temperature class, see section [1]															
4 = T4															
6 = T6 (only for XS execution )															
Certification type															
- (omit for ATEX )															
/UL = C UL US															
Size:															
0 = 6															
Valve configuration, see section 4.1															
61, 63, 71, 75															
(configurations 63 and 75 are available only with spool type 1/2)															
Spool type, see section 4.2															
Options:															
A = solenoid at side of port B															
V = with handwheel manual override															
7 = for ambient temperature up to 70°C (only for Atex)															
O = horizontal cable entrance															
Solenoid threaded connection:															
M = M20x1,5 UNI-4535 (6H/6g)															
NPT = 1/2" NPT ANSI B2.1 (tapered) only for /UL															
Optional cable gland:															
PA = with threaded cable gland, see section [17]															

#### 4.1 Hydraulic configuration

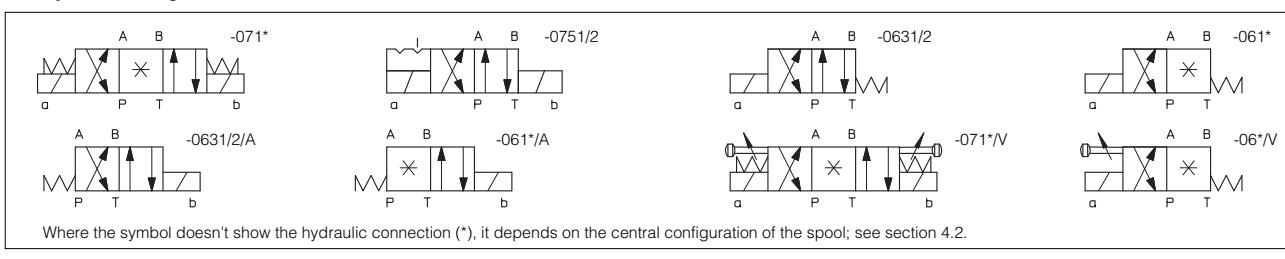


#### 4.2 Spools - for intermediate passages, see tab. E001.



## 5 POPPET TYPE LEAK FREE DIRECTIONAL SOLENOID VALVES: MODEL CODE

DLOH	X	6	-	3	A	/	PA	-	M	-	AO	/	V	24DC	**	*
DLOH - DLOK = poppet type - direct DLOP = poppet type - piloted DLP = as DLOPX but without pilot valve																Synthetic fluids: WG = water-glycol PE = phosphate ester
X = Stainless steel execution for all parts XS = Stainless steel execution for external parts															Series number	Voltage code - see section 3
Temperature class, see section 1 4 = T4 (only for DLOH* and DLOK*) 6 = T6 (not for DLOKXS)															Options: ( not for DLPX ) R = with solenoid manual reset V = with handwheel manual override 7 = for ambient temperature up to 70°C (only for Atex) O = Horizontal cable entrance Only for DLOPX D = internal drain E = external pilot pressure	Certification type: AO = Group II, Atex AO/UL = C UL US
3 = three way															Solenoid threaded connection: M = M20x1,5 UNI-4535 (6H/6g) NPT = 1/2" NPT ANSI B2.1 (tapered) only for /UL	Optional cable gland: PA = with threaded cable gland, see section 17
Valve configuration, see section 5.1 A = A to T in rest position C = P to A in rest position																

### 5.1 Hydraulic configuration

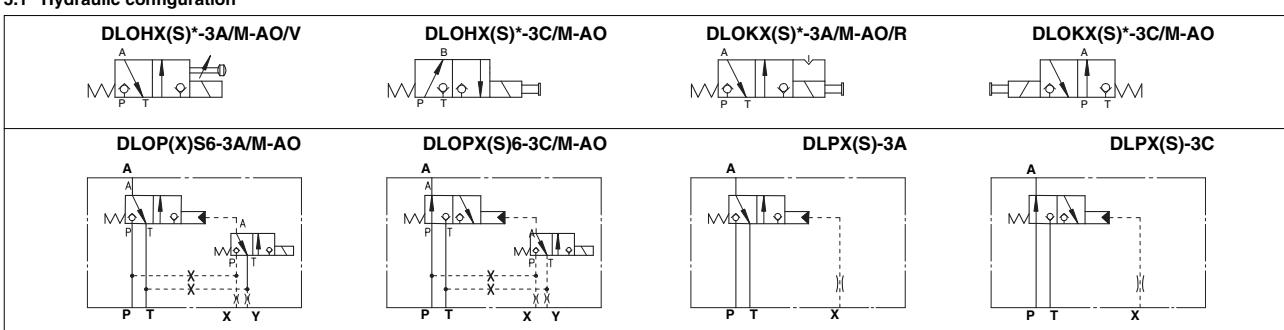

## 6 PRESSURE CONTROL VALVES: MODEL CODE


### 6.1 Screw-in type

SP-CART	MX	/	350	/	*	/	*	**	/	*
Screw-in relief cartridge										
See note (1): MX(S)-3 = G1/2 MX(S)-6 = M33x1,5 AREX(S)-20 = M35x1,5										
Pressure range 50 = 50 bar (not for AREX(S)-20 PED) 100 = 100 bar 210 = 210 bar 315 = 315 bar (only for AREX(S)-20) 350 = 350 bar (not for AREX(S)-20) 400 = 400 bar (only for AREX(S)-20)										
(1): X= Stainless steel execution for all parts XS= Stainless steel execution for external parts										
Only for PED P = factory preset regulation										
Options PED = reduced leakages and certified according to 97/23/CE										

### 6.3 Control cover

LIMM	X	-	2	/	350	**	/	*
Cover according to ISO 7368								
X= Stainless steel execution for all parts								
XS= Stainless steel execution for external parts								
Size: 2 = 25								
Pressure range 50 = 6 ÷ 50 bar 100 = 8 ÷ 100 bar 210 = 10 ÷ 210 bar 350 = 15 ÷ 350 bar								

### 6.5 hydraulic configuration

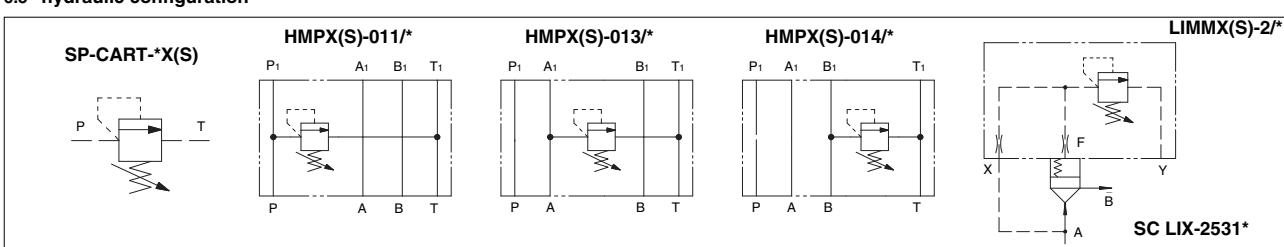

### 6.2 Modular type




HMP	X	-	011	/	350	**	/	*
Modular pressure relief valve ISO 4401 size 06								
X= Stainless steel execution for all parts								
XS= Stainless steel execution for external parts								
Configuration, see section 6.5 011, 013, 014								
Pressure range for HMP: 50 = 50 bar 100 = 100 bar 210 = 210 bar 350 = 350 bar								

### 6.4 Standard cartridge valve to be coupled with LIMMX(S) cover


SC LI	X	-	25	31	2	**	/	*
Cartridge according to ISO 7368								
X= Stainless steel execution for all parts								
Size 25								
Area ratio 1÷1								
Spring cracking pressure 1 = 0,3 bar 2 = 1,2 bar 3 = 3 bar 6 = 6 bar								

Note: for LIMMXS cover, the standard SC LI-25\* cartridge can be used


**7 Q/Δp DIAGRAMS** (based on mineral oil ISO VG 46 at 50°C)

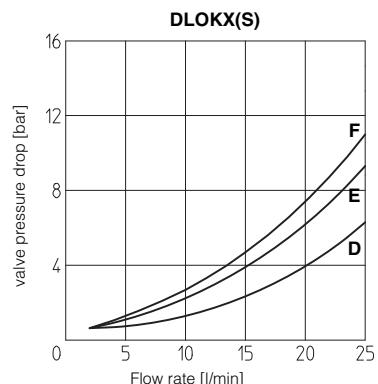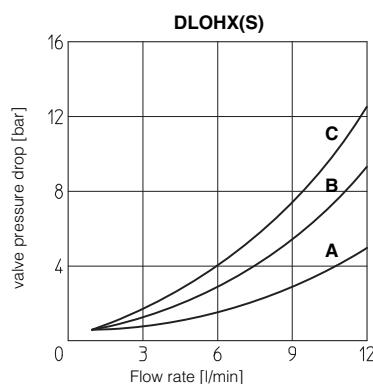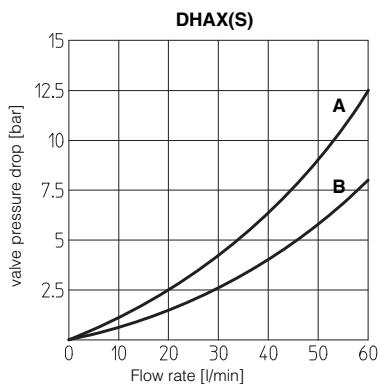

DLOPX(S)

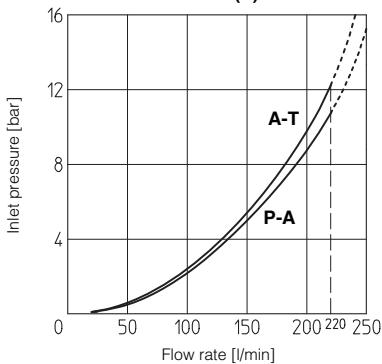

SCLIX-2531\*

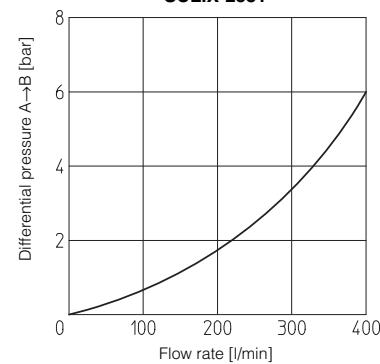


DHAX(S)

Spool type	Flow direction				
	P → A	P → B	A → T	B → T	P → T
0	B	B	B	B	A
1, 1/2	A	A	A	A	
3	A	A	B	B	
6	A	A	B	A	
7	A	A	A	B	


Valve type	Flow direction	
	P → A (P → B)	A → T (B → T)
DLOHX(S)-3A	C	B
DLOHX(S)-3C	B	A
DLOKX(S)-3A	F	E
DLOKX(S)-3C	E	D

**8 OPERATING LIMITS OF ON/OFF DIRECTIONAL CONTROLS** (based on mineral oil ISO VG 46 at 50°C)


The diagram have been obtained with warm solenoids and power supply at lowest value ( $V_{nom}$ -10%). For DHAX(S) valves the curves refer to application with symmetrical flow through the valve (i.e. P → A and B → T). In case of asymmetric flow the operating limits must be reduced.

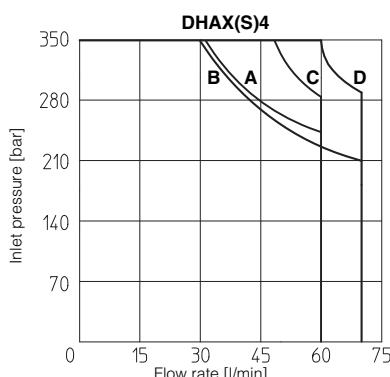


DHAX4    A = Spools 0,1    B = Spools 1/2, 3, 6, 7  
DHAX4    C = Spools 0,1    D = Spools 1/2, 3, 6, 7

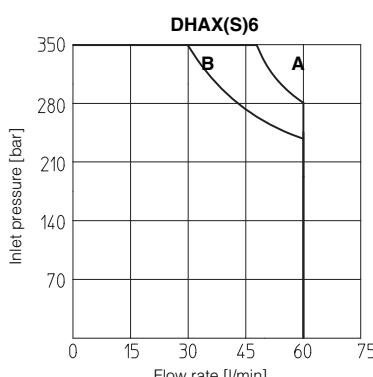


A = Spools 0,1    B = Spools 1/2, 3, 6, 7

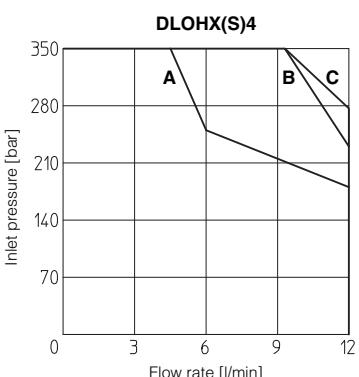


DLOHX4    A = Spool 3C    B = Spool 3A  
DLOHXS4    C = Spools 3C, 3A

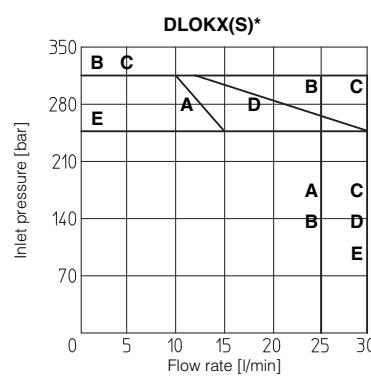

DLOKX4    A = Spool 3C    B = Spool 3A  
DLOKXS4    C = Spool 3A    D = Spool 3C  
DLOKXS6    E = Spool 3A, 3C

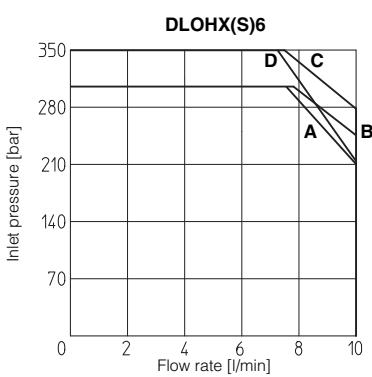







DLOHX6    A = Spool 3A    B = Spool 3C  
DLOHXS6    C = Spool 3A    D = Spool 3C

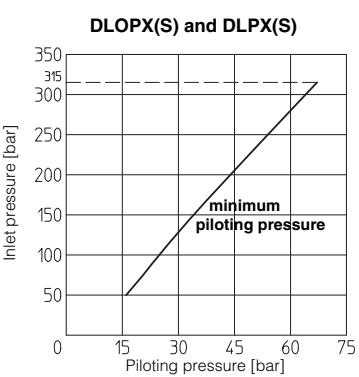




**8.1 Internal leakages** internal leakage of DLOHX(S), DLOKX(S), DLOPX(S) and DLPS(X): less than 5 drops/min (0,36 cm³/min) at max pressure.

**8.2 Piloting pressure for DLOPX(S) and DLPS(X)** max piloting pressure = 315 bar; min piloting pressure = see diagram


**9 REGULATED PRESSURE VERSUS FLOW DIAGRAM** of screw-in cartridge valves (based on mineral oil ISO VG 46 at 50°C)

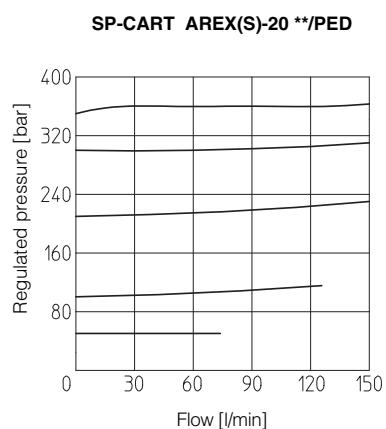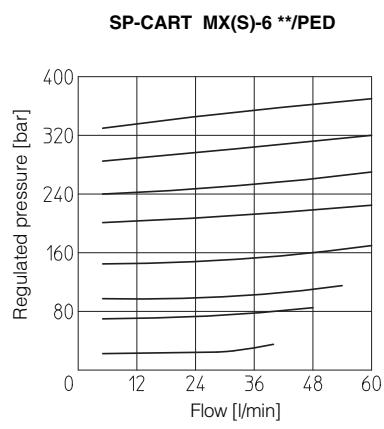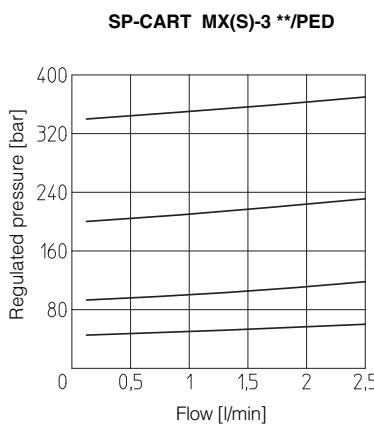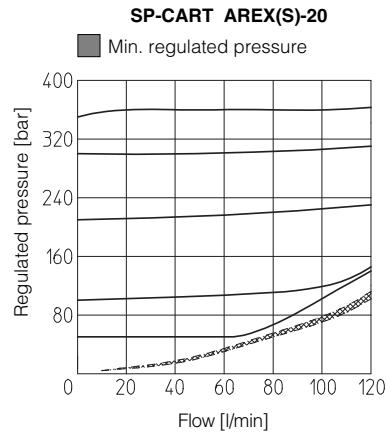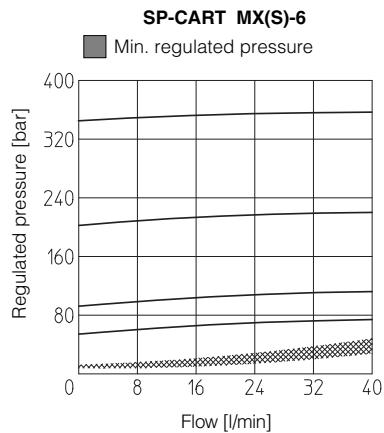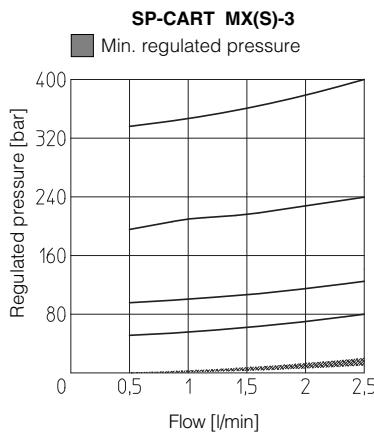


**10 PERMITTED WORKING RANGES** of screw-in cartridge valves with PED option (shared area)

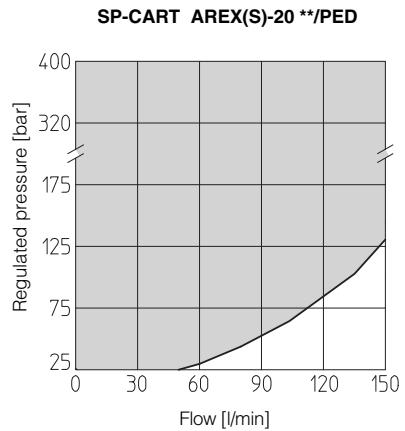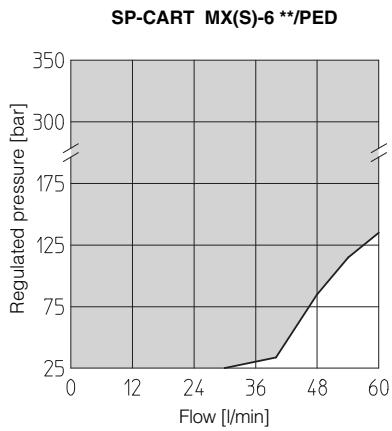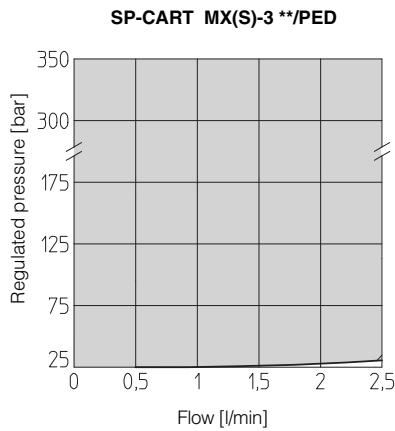


**10.1 Regulated pressure for modular valves**

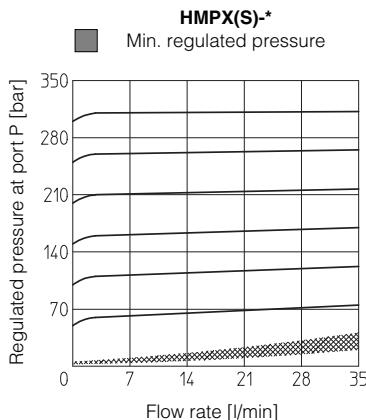


**11 INSTALLATION DIMENSIONS OF DHAX(S) [mm]**

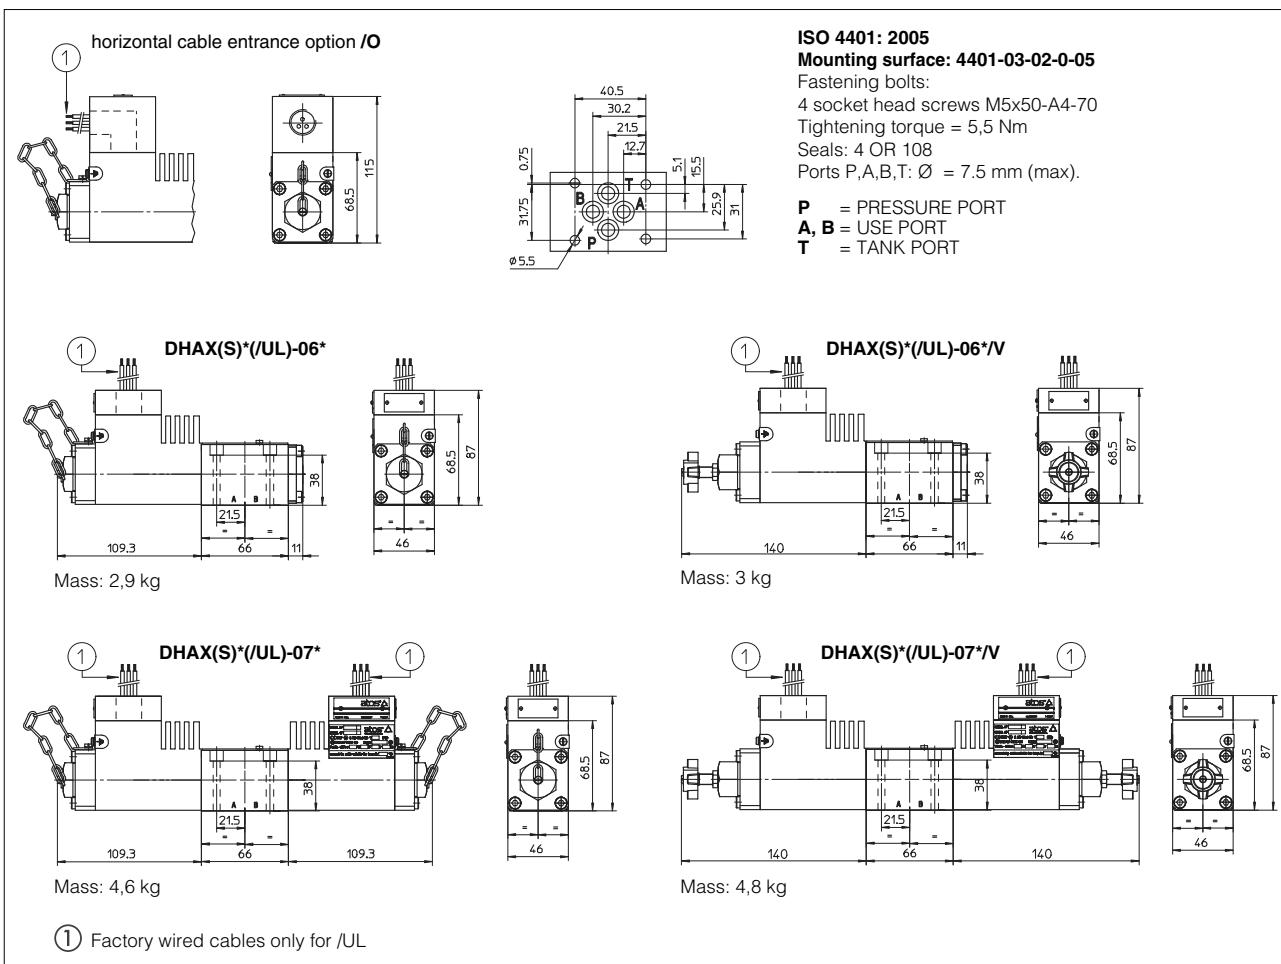


**12 INSTALLATION DIMENSIONS OF DLOHX(S) AND DLOKX(S) [mm]**

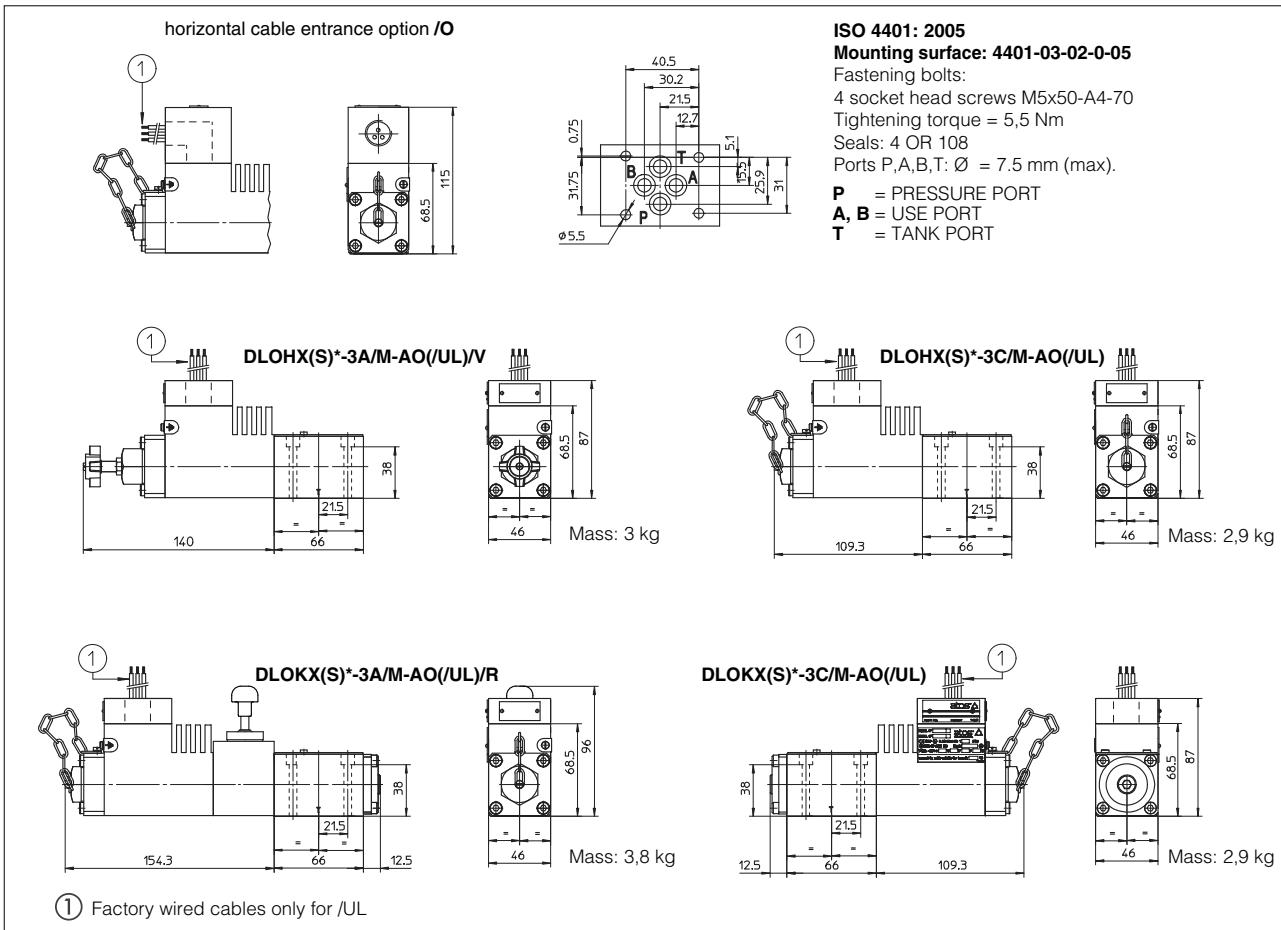

**13 INSTALLATION DIMENSIONS OF DLOPX(S) AND DLGX(S) [mm]**

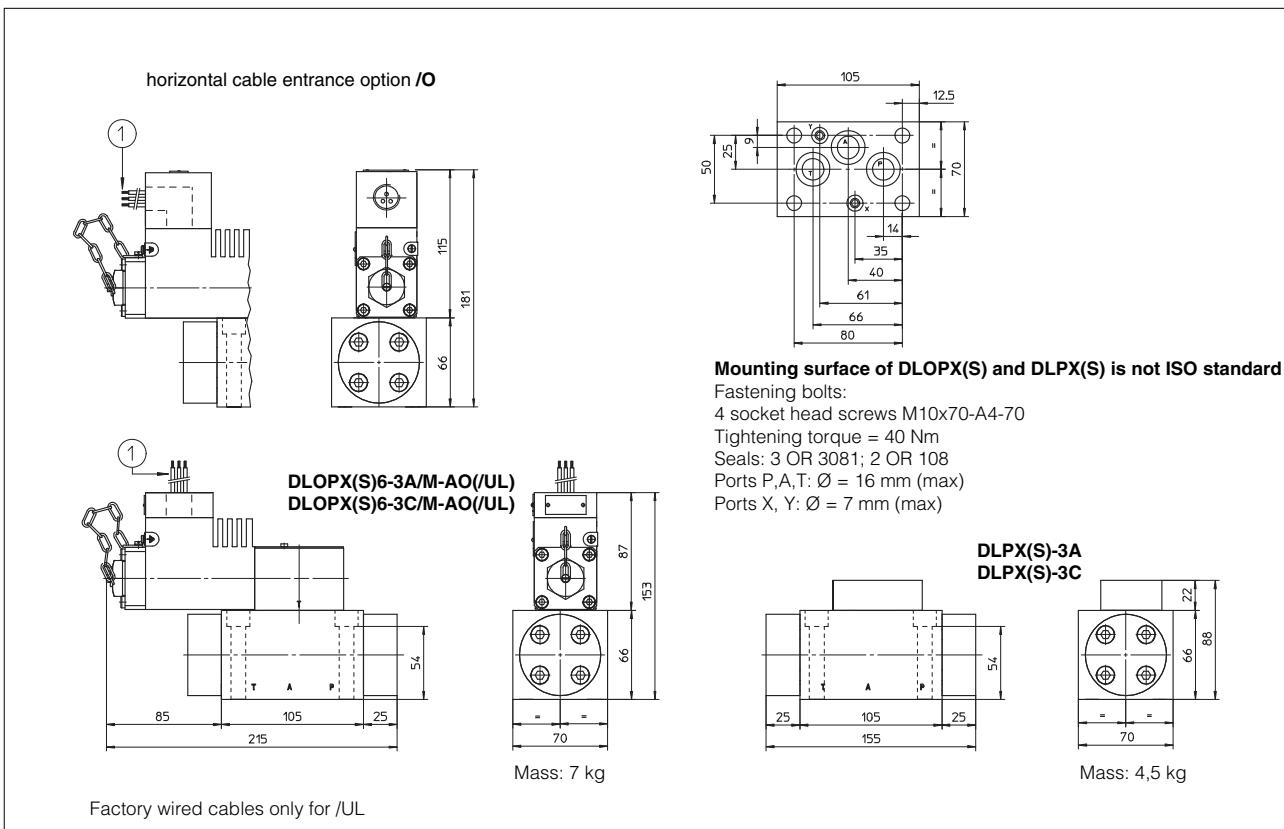

**14 INSTALLATION DIMENSIONS OF SCREW IN PRESSURE RELIEF VALVES [mm]**

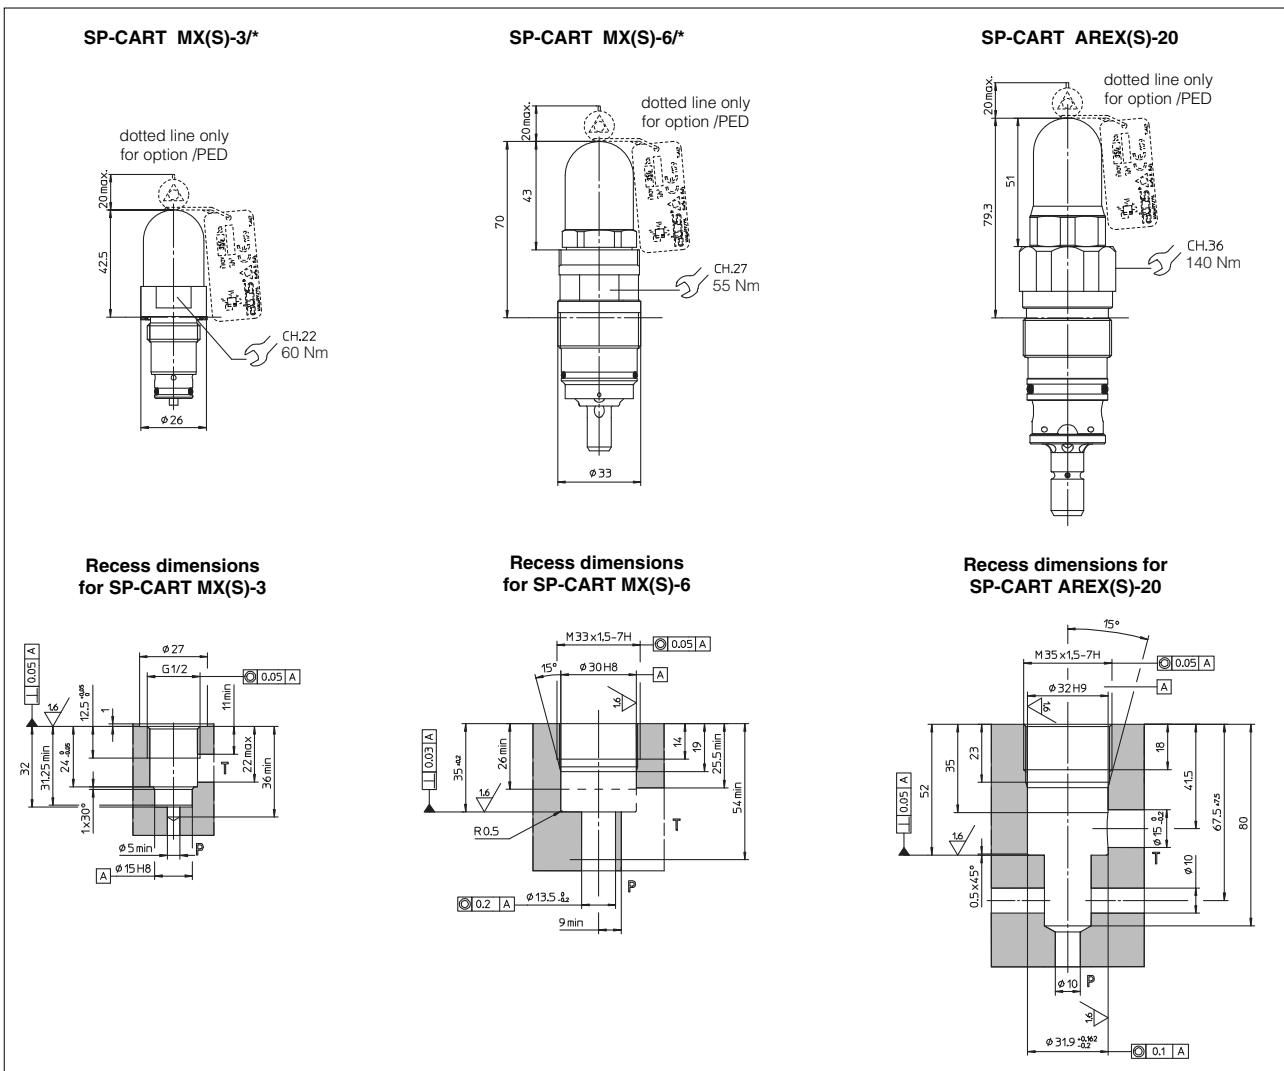

## 15 INSTALLATION DIMENSIONS OF MODULAR AND CARTRIDGE VALVES

**ISO 4401: 2005**


**Mounting surface: 4401-03-02-0-05**

Fastening bolts: M5x\*\*-A4-70


Tightening torque = 5,5 Nm

Seals: 4 OR 108

Ports P,A,B,T: Ø = 7.5 mm (max)




**HMPX(S)-011/\***




Mass: 1,4 kg

**LIMMX(S)-2/\***




Mass: 2,2 kg


**Cover interface dimensions for LIMMX(S)-2**

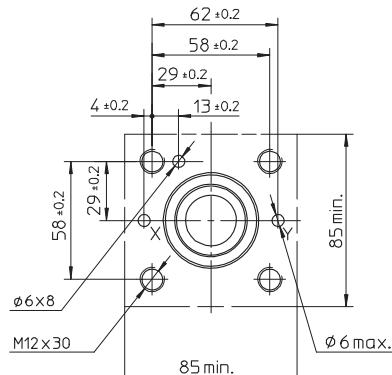


**HMPX(S)-013/\***




Mass: 1,2 kg




**Recess dimensions for SC LIX-25**

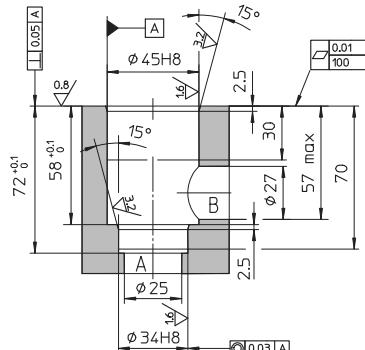

**HMPX(S)-014/\***



Mass: 1,2 kg




## 16 SOLENOID WIRING

**Solenoid wiring (ATEX)**



- 1 = Coil
- 2 = GND
- 3 = Coil

**Solenoid wiring (UL)**




- |           |           |
|-----------|-----------|
| <b>AC</b> | <b>DC</b> |
| white     | red       |
| green     | green     |
| black     | black     |

## 17 CABLE GLAND

**STAINLESS STEEL CABLE GLAND SP-PAX19/\* (PG9 - IP67)**

Stainless steel cable glands - available on request - are certified ATEX according to EN60079-0 and EN60079-1.



Following codes have to be specified for spare cable glands:

**SP-PAX19/M** = with threaded connection M20x1,5 UNI-4535 (6H/6g).

This cable gland must be blocked with loctite or similar with a lock nut.

The valves must be connected to the power supply using the terminal board inside the solenoid.

**The cable must be suitable for the working temperature as specified in the "safety instructions" delivered with the first supply of the products.**

Additional equipotential grounding can be also performed by the user on the external facility provided on the solenoid case.

Minimum section of external ground wire = 4 mm<sup>2</sup>.

Minimum section of internal ground wire = the same of supply wire.

In order to reach the terminal board inside the solenoid, the top plate of the solenoid must be removed.

Solenoids are provided with threaded connection for cable entrance:

M20x1,5 (UNI-4535)