


Stainless steel valves for water base fluids

standard or explosion-proof solenoid valves, with Atex or C UL US certification

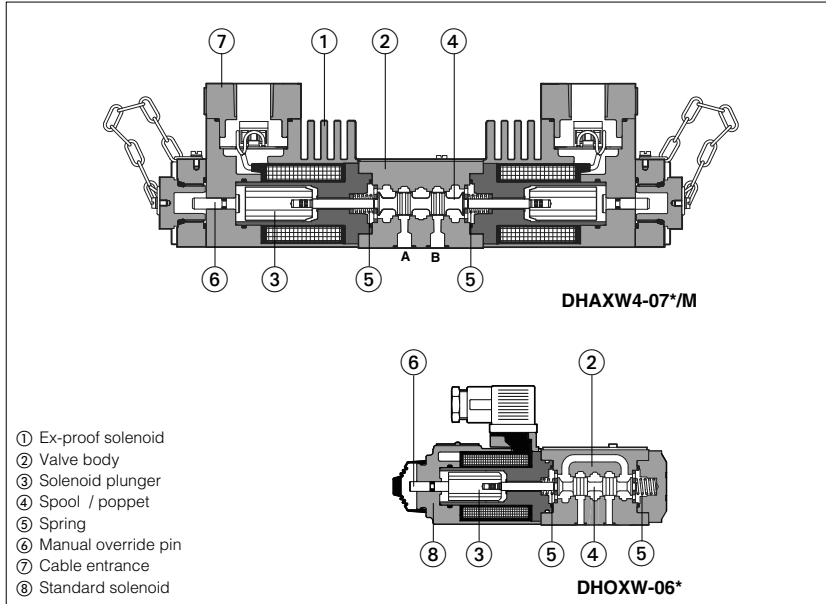

New line of directional solenoid valves with stainless steel internal parts for application with water base fluids.

Features:

- These valves are made by selected inoxidizable materials for internal parts to withstand applications with water base fluids or just pure water. External components are derived from standard valves.
- Two basic versions are available, poppet type, 3-way leak free (suitable for accumulator systems) or spool type, 4-way on-off valves.
- The valves are available with standard ⑧ or ex-proof solenoids ①, these last certified according to:
 - ATEX 94/9/CE certification, protection mode Ex II 2GD, Ex d IIC T6/T4/T3, Ex tD A21 IP67
 - C UL US certification, according to UL 1002 and CSA 22.2 n°139-1982 class I Group C & D (Groups IIA & IIB to NEC 505-7)
- ISO standard subplate mounting.

Options for ex-proof version:

- Handwheel manual override ⑧ (option /V)
- Manual reset ⑨ (option /R) for safety applications
- Horizontal cable entrance.

Common Applications:

Steel plants, die casting, foundry.

1 STAINLESS STEEL VALVES: MAIN DATA

Code (1)	Description	ISO size	Voltages		ATEX		C UL US		Max flow l/min	Δp (at max flow) bar	Max pressure bar (3)	
			DC	AC	T class (1) Standard	Option /7	Input Power	T class (1)				Input Power
DHOXW	4 way, spool type direct solenoid valves	06 (ISO 4401)	12		-	-	32 W (only for 12 and 24 DC)	-	-	60	see diagram at section ⑧	350
DLOHXW	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	24		-	-		-	12	350		
DLOKXW	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	110		-	-	40 W (only for 110 and 220 DC)	-	25	315		
DLOPXW	3 way, poppet type, piloted solenoid valve	no	220		-	-		-	220	315		
DHAXW4 DHAXW6	4 way, spool type direct solenoid valves	06 (ISO 4401)	12	12/50/60	T6 T4	T4 T3	8 W 25 W	(2) T4	12 W 33 W	60 70	350	
DLOHXW4-AO DLOHXW6-AO	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	24	24/50/60	T6 T4	T4 T3	8 W 25 W	(2) T4	12 W 33 W	10 12	315 350	
DLOKXW4-AO DLOKXW6-AO	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	48	110/50	T6 T4	T4 T3	8W 25 W	(2) T4	12 W 33 W	25 30	250 315	
DLOPXW6-AO	3 way, poppet type, piloted solenoid valve	no	110	120/60 220/50	T6 T4	T4 T3	8W 25 W	(2) T4	12 W 33 W	25 30	315	
			220	220/60	T6	T4	8 W	(2)	12 W	220	315	

Notes:

- 1) XW6 and XW4 versions differ only for the coil power (see Input Power) - For ATEX certification the certified temperature class T6, T4, T3 is related to the max ambient temperature, from which results the max solenoid surface temperature allowed in the application (see section ③). The reference ambient temperature is -40÷+40°C, for higher ambient temperature (-40÷+70 °C) the temperature class has to be degraded (option /7). For C UL US certification the temperature class is related to the coil power 12W or 33 W
- 2) For C UL US certification the temperature class corresponding to the coil power 12W is not reported in the nameplate marking. For coil power 33W the temperature class is T4.
- 3) Max pressure on T port = 110 bar
- 4) Valves are provided by HNBR seals, which allow min ambient temperature down to -40 °C (max oil viscosity = 380 cSt). The min ambient temperature for valves with PE option (FPM seals) is -20°C.

2 MATERIALS SPECIFICATION

Valve type	solenoid housing ①	valve body ②	internal parts ③ + ④	spring ⑤	seals	
					std	/PE
DHAXW DHOXW	Cast iron	AISI 316L	AISI 316L, 420B, 440C, 430F	AISI 302	HNBR (buna)	FPM (viton)
DLOHXW DLOKXW DLOHXW-AO DLOKXW-AO	Cast iron	AISI 316L	AISI 316L, 420B, 440C, 430F	AISI 302	HNBR (buna)	FPM (viton)
DLOPXW DLOPXW-AO	Cast iron	AISI 630	AISI 316L, 420B, 440C, 430F	AISI 302	HNBR (buna)	FPM (viton)

3 MAIN CHARACTERISTICS

Assembly position / location	Any position for all valves except for type - 070° (without springs) that must be installed with horizontal axis if operated by impulses
Subplate surface finishing	Roughness index $\sqrt{0.4}$ flatness ratio 0,01/100 (ISO 1101)
Ambient temperature	from -20°C to +70°C
Fluid	Hydraulic oil as per DIN 51524 535; for other fluids see section 6 and 7
Recommended viscosity	15 ÷ 100 mm ² /s at 40°C (ISO VG 15 ÷ 100)
Fluid contamination class	ISO 19/16, achieved with in line filters at 25 µm value to $\beta_{25} \geq 75$ (recommended)
Fluid temperature	-20°C +60°C (standard and /WG seals) -20°C +80°C (/PE seals)
Flow direction	As shown in the symbols of tables 6.1 and 7.1
Operating pressure	See main data at section 1
Rated flow	See diagrams Q/Δp at section 7
Maximum flow	See operating limits at section 8

4 COILS CHARACTERISTICS for valves with standard solenoids

Insulation class	H (180°C) Due to the occurring surface temperatures of the solenoid coils, the European standards EN563 and EN982 must be taken into account
Relative duty factor	100%
Voltage code	X12DC = 12Vdc X24DC = 24Vdc X110DC = 110Vdc X220DC = 12Vdc
Supply voltage tolerance	± 10%

5 EXPLOSION PROOF SOLENOIDS: MAIN DATA


VALVE TYPE		DLOHXW6 DLOKXW6 DLOPXW6		DHAXW4 DLOHXW4 DLOKXW4
Solenoid code	Group II, ATEX, UL	OAX/WP		OAX/WP
Voltage code	Vdc ±10% VAC 50/60 Hz ±10%	12DC, 24DC, 48DC, 110DC, 220DC 12AC, 24AC, 110AC, 230AC (1)		
Power consumption	ATEX C UL US	8W 12W		25W 33W
Coil insulation		Class H		
Protection degree		IP 66 According to IEC 144 when correctly coupled with the relevant cable gland SP-PA19*, see section 17		
Duty factor		100%		
Mechanical construction		Explosion proof safety case classified Ex d, according to EN 60079-0: 2006, EN 6079-1: 2007		
Cable entrance and electrical wiring		Internal terminal board for cable connection threaded connection M20x1,5 for cable entrance, vertical (standard) or Horizontal (option /O). See section 17 for cable gland		
Method of protection		Ex d		
Temperature class (surface temperature)	ATEX C UL US	T6 (≤ 85°C)	T4 (≤ 135°C) option /7	T4 (≤ 135°C) T3 (≤ 200°C) option /7
Ambient temperature	ATEX C UL US	-40 ÷ +45 °C	-40 ÷ +70 °C	-40 ÷ +40 °C -40 ÷ +70 °C
Atex certification		C UL US certification		
Ex = Equipment for explosive atmospheres II = Group II for surfaces plants 2 = High protection (equipment category) GD = For gas, vapours and dust d = Flame proof housing IIC = Gas group T6/T4/T3 = Temperature class of solenoid surface referred to +40°C ambient temperature tD = Dust ignition protection A21 = Housing protection practice (for dust) IP67 = Protection degree Zone 1 (gas) and 21 (dust) = Possibility of explosive atmosphere during normal functioning Zone 2 (gas) and 22 (dust) = Low probability of explosive atmosphere		Class I = Equipment for famable gas and vapours Division 1 = Possibility of explosive atmosphere during normal functioning Groups C&D = Gas group (according to UL 1002) Groups IIA&IIB = Gas group (according to NEC 505-7) T4 = Temperature class of solenoid surface referred to +70°C ambient temperature		

(1) For alternating current supply a rectifier bridge is integrated in the solenoid


6 SPOOL TYPE DIRECTIONAL SOLENOID VALVES: MODEL CODE

DH	A	XW	4	*	- 0	63	1/2	/ PA - M / V	24DC	**	/*
Spool type - direct A = ex-proof solenoids O = standard solenoids Stainless steel execution for internal parts Temperature class, see section 11 (only for DHA) 4 = T4 6 = T6 Certification type - (omit for ATEX) /UL = C UL US Size: 0 = 06 Valve configuration, see section 6.1 61, 63, 71, 75 (configurations 63 and 75 are available only with spool type 1/2) Spool type, see section 6.2											
Synthetic fluids: WG = water-glycol PE = phosphate ester Series number Voltage code - see section 4 (for DHO), see section 5 (for DHA) Options: A = solenoid at side of port B Options (only for DHA): V = with handwheel manual override 7 = for ambient temperature up to 70°C (only for ATEX) O = horizontal cable entrance Solenoid threaded connection (only for DHA): M = M20x1,5 UNI-4535 (6H/6g) NPT = 1/2" NPT ANSI B2.1 (tapered) only for /UL Optional cable gland (only for DHA): PA = with threaded cable gland, see section 17											

6.1 Hydraulic configuration

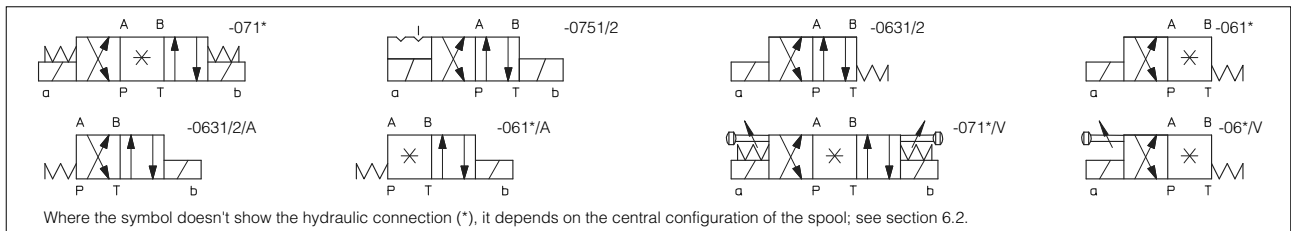


6.2 Spools - for intermediate passages, see tab. E001.







7 POPPET TYPE LEAK FREE DIRECTIONAL SOLENOID VALVES: MODEL CODE

DLOH	XW	6 - 3	A / PA - M - AO / V	24DC	**	/*
DLOH - DLOK = poppet type - direct DLOP = poppet type - piloted Stainless steel execution for internal parts Temperature class, see section 11 (only for ex-proof solenoids) 4 = T4 (for DLOH and DLOK) 6 = T6 (for all models) 3 = three way Valve configuration, see section 7.1 A = A to T in rest position C = P to A in rest position						
Synthetic fluids: WG = water-glycol PE = phosphate ester Series number Voltage code - see section 3 Options (only for ex-proof solenoids): R = with solenoid manual reset V = with handwheel manual override 7 = for ambient temperature up to 70°C (only for ATEX) O = Horizontal cable entrance Only for DLOP D = internal drain E = external pilot pressure Certification type: AO = Group II, ATEX AO/UL = C UL US Solenoid threaded connection (only for ex-proof solenoids): M = M20x1,5 UNI-4535 (6H/6g) NPT = 1/2" NPT ANSI B2.1 (tapered) only for /UL Optional cable gland (only for ex-proof solenoids): PA = with threaded cable gland, see section 17						

7.1 Hydraulic configuration

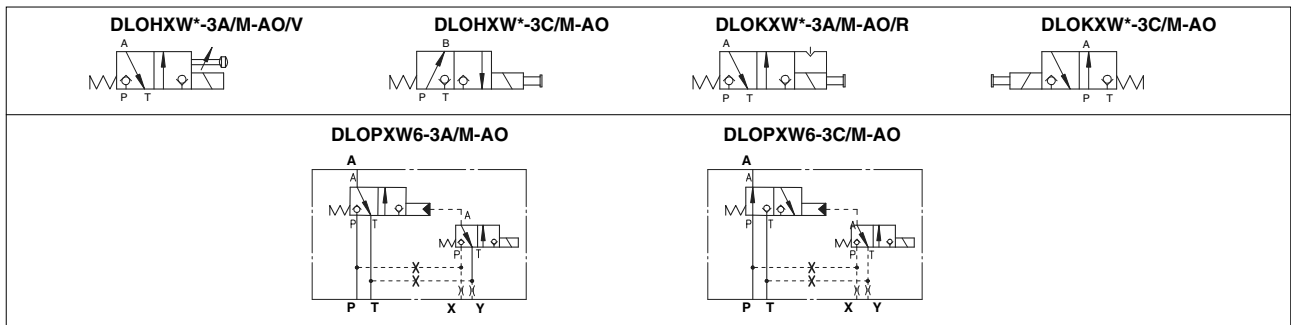

8 Q/Δp DIAGRAMS (based on mineral oil ISO VG 46 at 50°C)

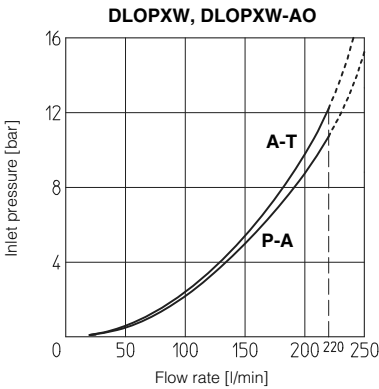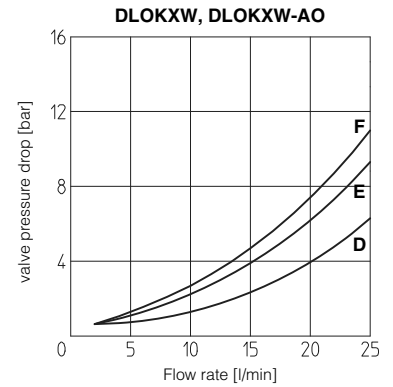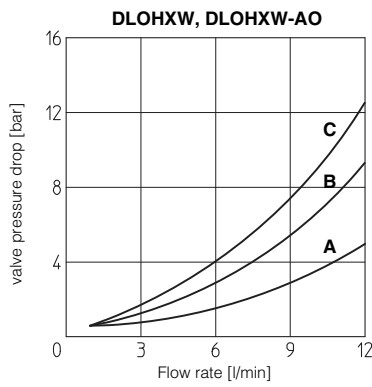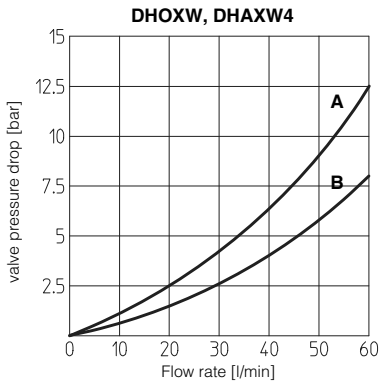







DHOXW, DHAXW

Spool type	Flow direction				
	P→A	P→B	A→T	B→T	P→T
0	B	B	B	B	A
1, 1/2	A	A	A	A	
3	A	A	B	B	
6	A	A	B	A	
7	A	A	A	B	

Valve type	Flow direction	
	P → A (P → B)	A → T (B → T)
DLOHXW-3A	C	B
DLOHXW-3C	B	A
DLOKXW-3A	F	E
DLOKXW-3C	E	D

9 OPERATING LIMITS OF ON/OFF DIRECTIONAL CONTROLS (based on mineral oil ISO VG 46 at 50°C)

The diagram have been obtained with warm solenoids and power supply at lowest value ($V_{nom} - 10\%$). For DHAXW valves the curves refer to application with symmetrical flow through the valve (i.e. P → A and B → T). In case of asymmetric flow the operating limits must be reduced.

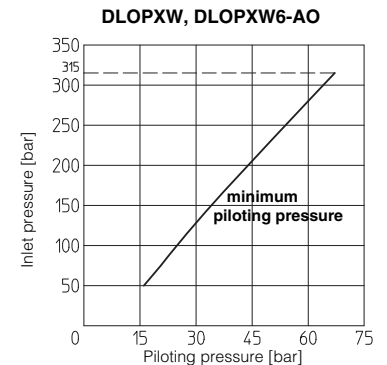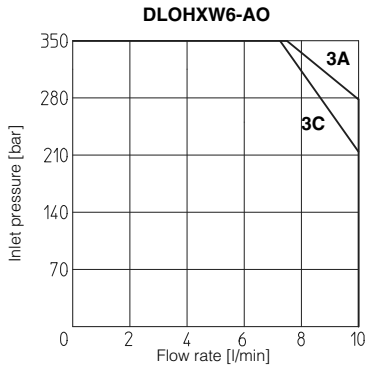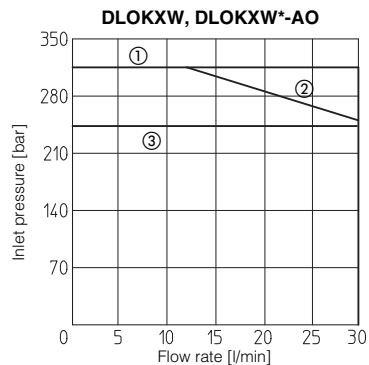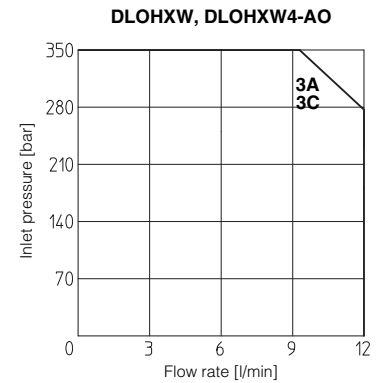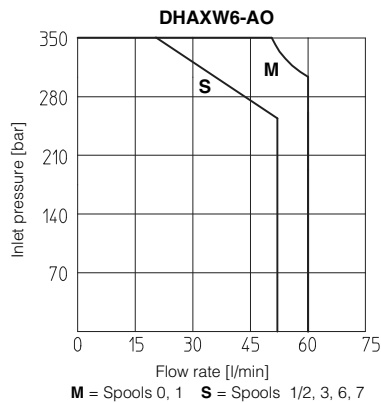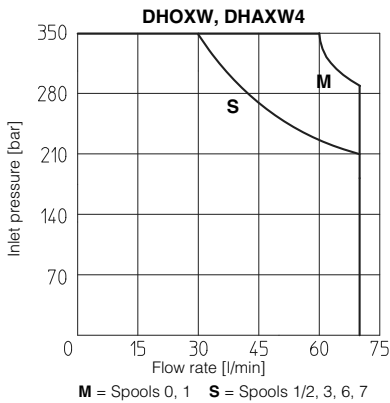

- ① DLOKXW-3A and DLOKXW4-3A-AO
- ② DLOKXW-3C and DLOKXW4-3C-AO
- ③ DLOKXW6-3A(3C)-AO

9.1 Internal leakages

internal leakage of DLOHXW, DLOKXW, DLOPXW and DLPXW: less than 5 drops/min (0,36 cm³/min) at max pressure.

9.2 Piloting pressure (DLOPXW and DLPXW)

- max piloting pressure = 315 bar
- min piloting pressure = see diagram

10 INSTALLATION DIMENSIONS OF DHOXW [mm]

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05


Fastening bolts:

4 socket head screws M5x50 class 12.9

Tightening torque = 8 Nm

Seals: 4 OR 108

Ports P,A,B,T: $\varnothing = 7.5$ mm (max).




P = PRESSURE PORT

A, B = USE PORT

T = TANK PORT


For the max pressures on ports, see section 4

DHOXW-06



Mass: 1,9 kg

DHOXW-07

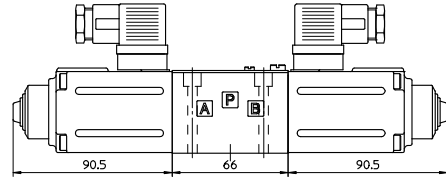

Mass: 2,6 kg

Overall dimensions refer to valves with connectors type SP-666

11 INSTALLATION DIMENSIONS OF DLOHXW and DLOXW [mm]

**DLOHXW-2*
DLOHXW-2*/R**

ISO 4401: 2005

**Mounting surface: 4401-03-02-0-05
without A and B ports**

Fastening bolts:



4 socket head screws M5x50 class 12.9

Tightening torque = 8 Nm

Seals: 2 OR 108

Ports P, T:

$\varnothing = 7.5$ mm (max)



Mass: 1,5 Kg

**DLO*XW-3*
DLO*XW-3*/R**

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05

Fastening bolts:



4 socket head screws M5x50 class 12.9

Tightening torque = 8 Nm

Seals: 4 OR 108

Ports P, A, B, T:

$\varnothing = 7.5$ mm (max)



Mass: 1,5 Kg

P = PRESSURE PORT
T = USE PORT

P = PRESSURE PORT
A = USE PORT (not used for -3C versions)
B = USE PORT (not used for -3A versions)
T = TANK PORT

DLOKXW-3*

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05

Fastening bolts:

4 socket head screws M5x50 class 12.9


Tightening torque = 8 Nm

Seals: 4 OR 108

Ports P, A, B, T:


$\varnothing = 7.5$ mm (max)

DLOK*XW-3C



Mass: 1,6 Kg

DLOK*XW-3A




Mass: 1,6 Kg

P = PRESSURE PORT
A = USE PORT
B = CLOSED
T = TANK PORT

Overall dimensions refer to valves with connectors type SP-666

12 INSTALLATION DIMENSIONS OF DLOPXW [mm]

**DLOPXW6-3A/M-AO/(UL)
DLOPXW6-3C/M-AO/(UL)**

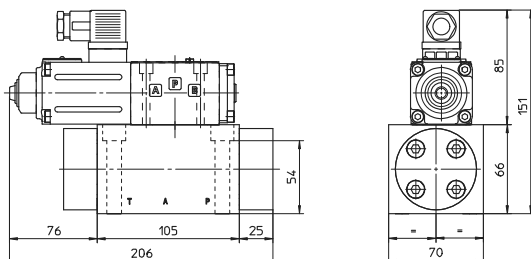

Mass: 7 kg

**Mounting surface of DLOPXW
is not ISO standard**

Fastening bolts:


4 socket head screws M10x70-A4-70

Tightening torque = 40 Nm

Seals: 3 OR 3081; 2 OR 108



Ports P,A,T: $\varnothing = 16$ mm (max)

Ports X, Y: $\varnothing = 7$ mm (max)



Overall dimensions refer to valves with connectors type SP-666

13 INSTALLATION DIMENSIONS OF EX-PROOF DHAXW [mm]

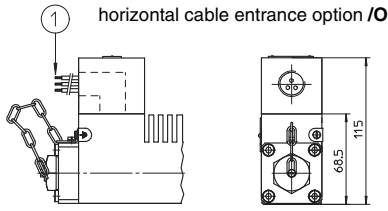

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05

Fastening bolts:

4 socket head screws M5x50-A4-70

Tightening torque = 5,5 Nm





Seals: 4 OR 108

Ports P,A,B,T: $\varnothing = 7.5$ mm (max).

P = PRESSURE PORT



A, B = USE PORT

T = TANK PORT

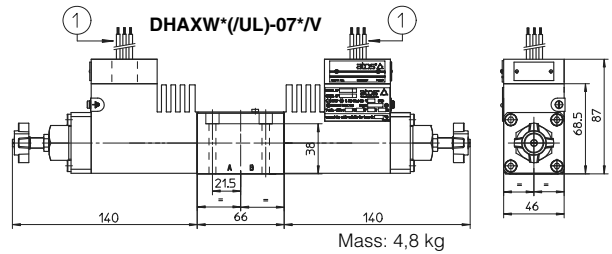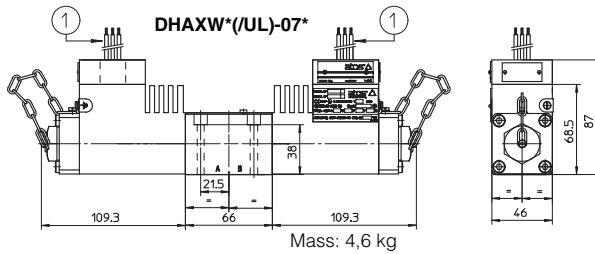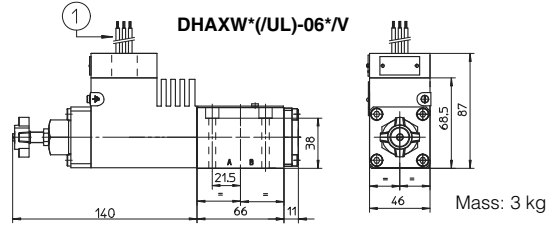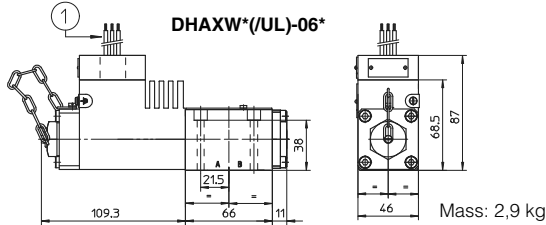

① Factory wired cables only for /UL

14 INSTALLATION DIMENSIONS OF EX-PROOF DLOHXW AND DLOKXW [mm]

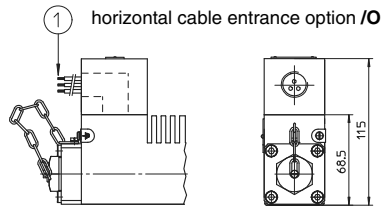

ISO 4401: 2005

Mounting surface: 4401-03-02-0-05

Fastening bolts:

4 socket head screws M5x50-A4-70

Tightening torque = 5,5 Nm





Seals: 4 OR 108

Ports P,A,B,T: $\varnothing = 7.5$ mm (max).

P = PRESSURE PORT


A, B = USE PORT

T = TANK PORT

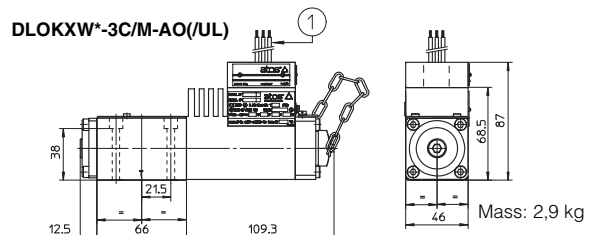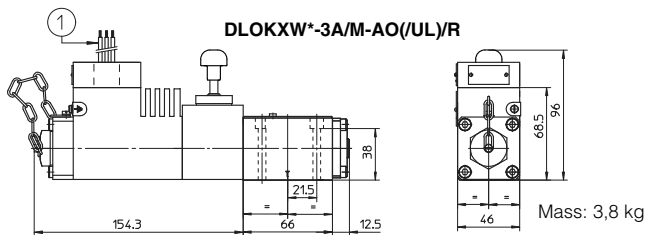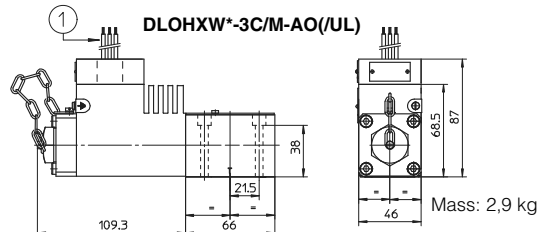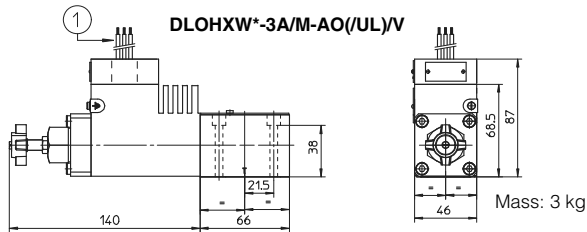

① Factory wired cables only for /UL

15 INSTALLATION DIMENSIONS OF EX-PROOF DLOPXW AND DLPXW [mm]

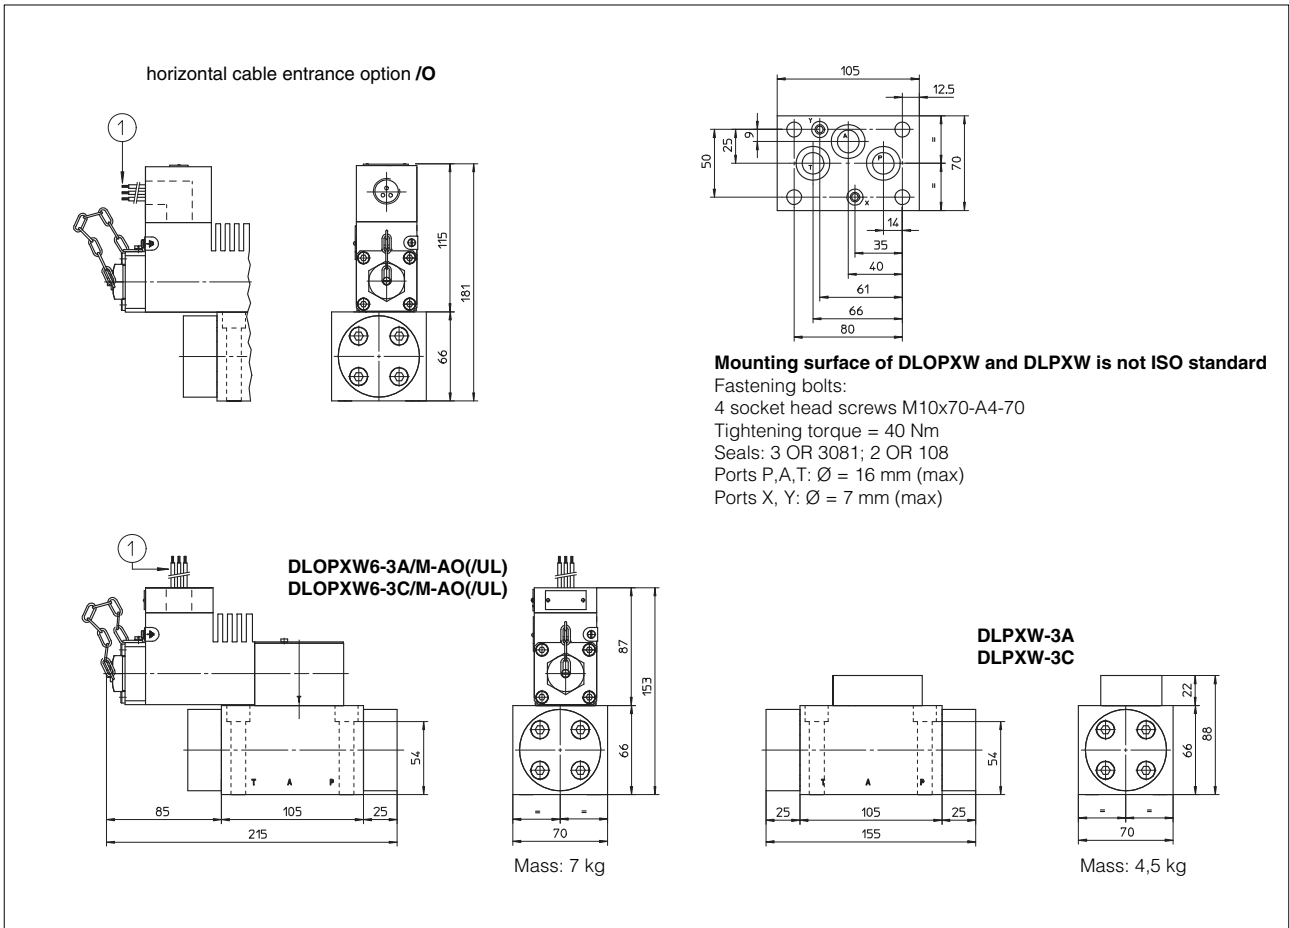

16 SOLENOID WIRING



17 CABLE GLAND

